

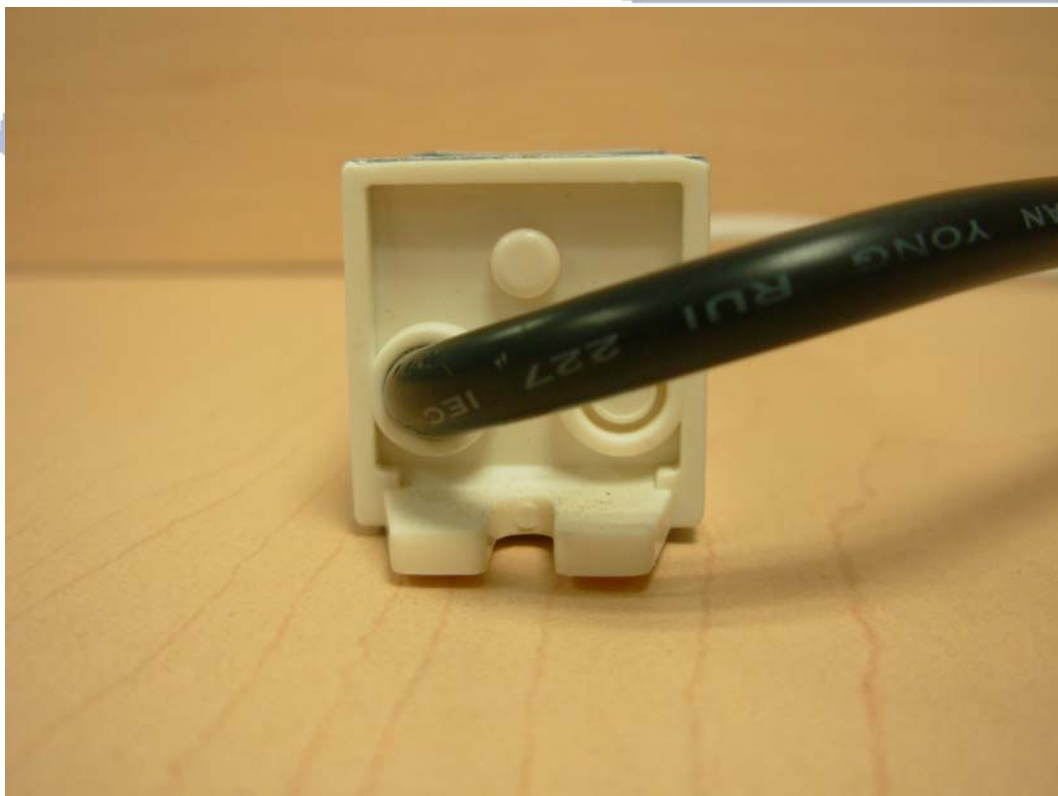
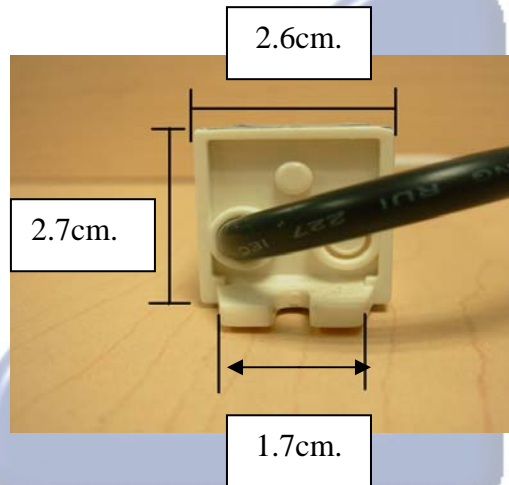
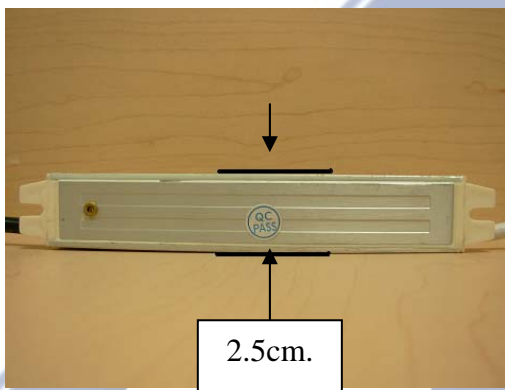


SA-10-700

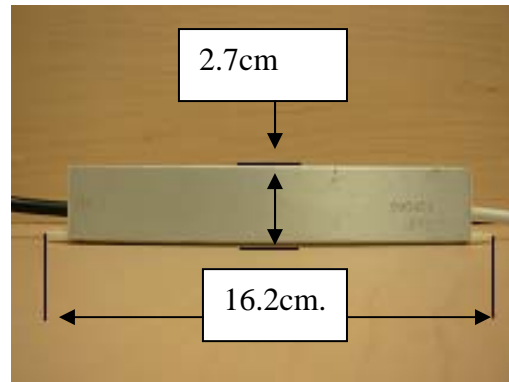

Dimensiones.


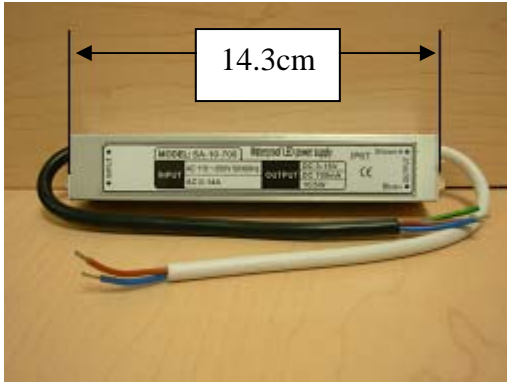


NUMERO DE PARTE: SA-10-700


ENTRADA	AC 110-250V 50/60Hz.	SALIDA	DC 3-15V
	AC 0.14A		DC 700mA.
			10.5W

Conexiones

Entrada

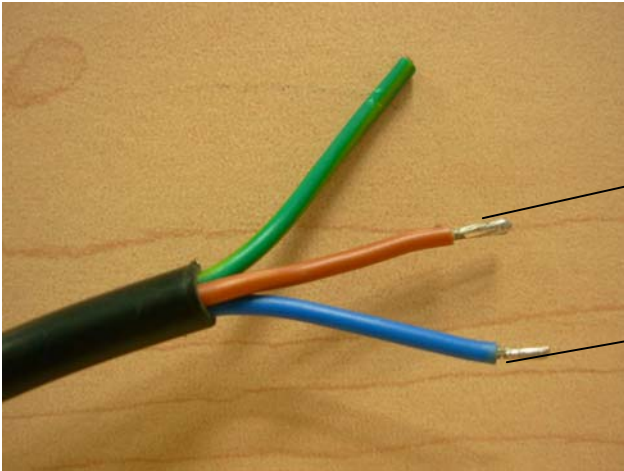


Salida

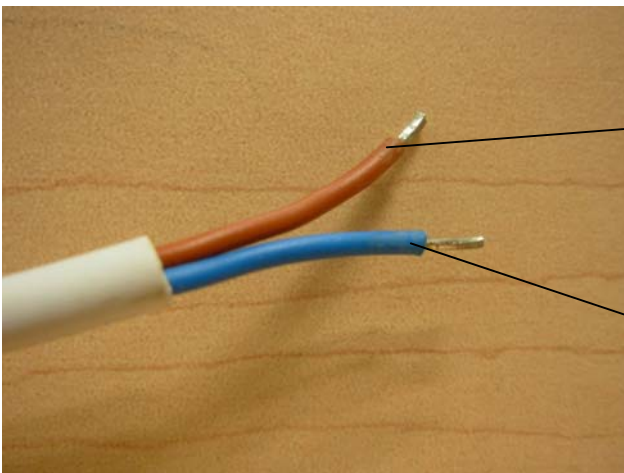

Café

Azul

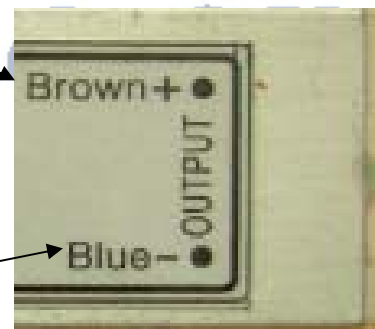

RESUMEN

Features:

1. High efficiency, high reliability
2. 100% full load burn-in test
3. Protections: Short circuit, over load, over voltage, over thermal
4. Thunder proof Protection
5. Completely air proof, achieve waterproof rate IP 68.
6. Safety: CE 、 ROHS
7. 2 years warranty

Specification:

Input Rated Voltage: 90 – 130V / 170 – 250V

Input Rated Frequency: 50/60Hz

Input Frequency Range: 47Hz to 63Hz

Efficiency: 80% Min

Rated Output Voltage & Current: see the following outputs.

Output Line Regulation: $\pm 3\%$

Output Load Regulation: $\pm 5\%$

Output over Shoot: 10% Max

Protection: OCP OVP SCP OPP (recover automatically)

Dielectric Withstand Voltage: 1.5KV 5mA 60s

Environment:

Operating Temperature: -20°C to 70°C

Storage Temperature: -40°C to 85°C

Electrónica S.A. de C.V.